



# HI SOLIDS WET LOOK FLOOR POLISH

ORDER CODE

012.004

F06

- MACHINE BUFFING IMPROVES WEAR RATE & SHINE
- BUILDS GOOD SLIP RESISTANCE
- SUPER HI GLOSS "WET LOOK"


## DESCRIPTION

**MERLIN F06 HI SOLIDS WET LOOK FLOOR POLISH** is a high solids polymer floor sealer and polish. **MERLIN F06 HI SOLIDS WET LOOK FLOOR POLISH** incorporates special polymers to produce the 'wet look' finish, a first coat seals the floor, the second coat gives the gloss, a third coat may be applied if required for a super high gloss level.

## USES

**MERLIN F06 HI SOLIDS WET LOOK FLOOR POLISH** is suitable for use on PVC, thermoplastic floors, linoleum, rubber, sealed cork, sealed wood, asphalt, terrazzo, marble and stone.

**MERLIN F06 HI SOLIDS WET LOOK FLOOR POLISH** is suitable for hospital corridors & wards, schools, offices, shops, stores, airports, etc.

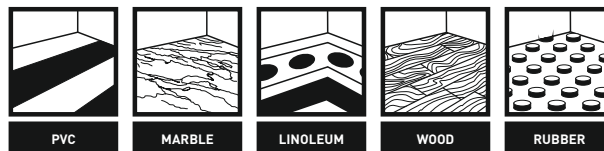

## DIRECTIONS

**PREPARATION:** For optimum results, thorough preparation of the floor must be undertaken. The floor must be thoroughly cleaned to completely remove dirt, grease and old polish films by using a quality floor polish remover such as **MERLIN F01 RINSE FREE FLOOR POLISH REMOVER** or **MERLIN F02 HEAVY DUTY FLOOR POLISH REMOVER**. The floor must be well rinsed with water to remove any stripper and allowed to dry before applying **MERLIN F06 HI SOLIDS WET LOOK FLOOR POLISH**.



**APPLICATION:** Apply a generous film of **MERLIN F06 HI SOLIDS WET LOOK FLOOR POLISH** with a clean mop or polish applicator. Drying time is normally around 30 minutes. Then a second coat is applied and allowed to dry. Coverage is dependant on the property of the floor covering. In general 5 litres of product will cover approximately 300 square metres of floor.

## SAFETY INFORMATION

Keep out of reach of children. Wear eye protection. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. **IF ON SKIN:** Wash with plenty of water. Contains Mixture of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-2H-isothiazol-3-one [EC no. 220-239-6] (3:1), Boron, Trifluoro(Tetrahydrofuran)-(T-4)-, Polymer with 3-Methyl-3-[[2,2,3,3,3-Pentafluoropropoxy]Methyl]Oxetane, Ether with 2,2-Dimethyl-1,3-Propanediol (2:1), Bis(Hydrogen Sulfate), Diammonium Salt. May produce an allergic reaction. For professional use only.



017.403

pH  
8

5L



0345 565 0939 | SALES@SELDRAM.CO.UK | WWW.SELDRAM.CO.UK